

FOXTAM Range of Split Core Current Transformers

Moulded case split core current transformers, all with unique clip-together features enabling a quick installation with the minimum of disturbance into existing networks without the need to disconnect in situ cabling.

TECHNICAL SPECIFICATIONS

Compliance:	IEC/EN 60044-1, BS3938
CE marked:	Yes
Rated system voltage:	Max 720V continuous
Insulation:	Max 3KV for 1 min
Frequency range:	50-60Hz
Material:	Moulded case polycarbonate UL94V-0
Ambient temp range:	-30°C to +80°C
Max continuous current:	1.2 x rated current

FOX.SC40


FEATURES

- PROTECTED TERMINALS
- MAX CABLE SIZE 40mm DIA.
- PRIMARIES FROM 100 AMPS TO 800 AMPS
- MAX OVERALL DIMENSIONS 116x105mm
- CLASS 1 (only)
- 1 AMP OR 5 AMP SECONDARIES



P/No.	CLASS	VA
FOX.SC40 100/5	1	1
FOX.SC40 150/5	1	1.5
FOX.SC40 200/5	1	2.5
FOX.SC40 250/5	1	2.5
FOX.SC40 300/5	1	2.5
FOX.SC40 400/5	1	5
FOX.SC40 500/5	1	5
FOX.SC40 600/5	1	5
FOX.SC40 800/5	1	5

FOX.SC40 DIMENSIONS

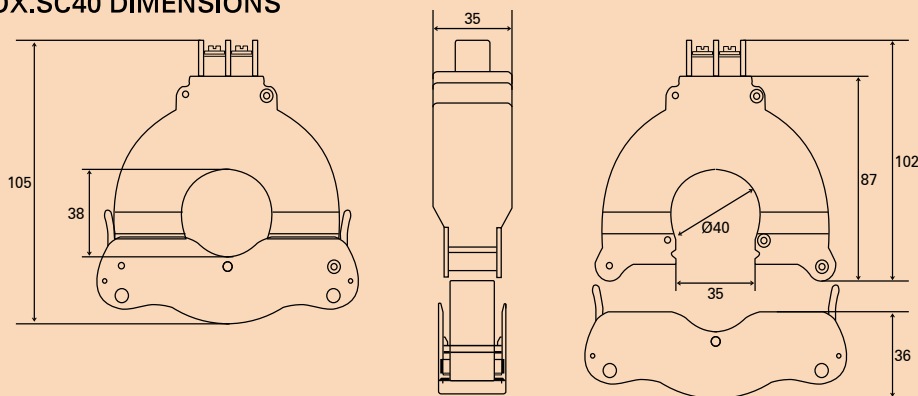

Maximum Width 116mm