

FOX.SC812


FEATURES

- PROTECTED TERMINALS
- INTEGRAL CABLE / BUS-BAR PINCH SCREWS
- PRIMARIES FROM 250 AMPS TO 3000 AMPS
- MAX APERTURE SIZE 82x122mm
- MAX OVERALL DIMENSIONS 155x198mm
- CLASS 1 (class 0.5 on request)
- 1 AMP OR 5 AMP SECONDARIES



P/No.	CLASS	VA
FOX.SC812 250/5	1	2.5
FOX.SC812 300/5	1	3.75
FOX.SC812 400/5	1	3.75
FOX.SC812 500/5	1	5
FOX.SC812 600/5	1	7.5
FOX.SC812 800/5	1	10
FOX.SC812 1000/5	1	15
FOX.SC812 1200/5	1	30
FOX.SC812 1500/5	1	45
FOX.SC812 1600/5	1	45
FOX.SC812 2000/5	1	45
FOX.SC812 2500/5	1	45
FOX.SC812 3000/5	1	45

DIMENSIONS

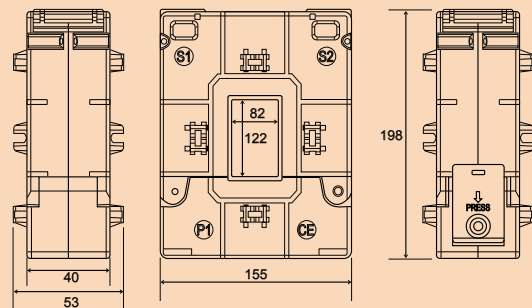

1 Amp secondaries available to special order, along with Class 0.5 on some ratios, please consult our sales office.

FOX.SC816


FEATURES

- PROTECTED TERMINALS
- INTEGRAL CABLE / BUS-BAR PINCH SCREWS
- PRIMARIES FROM 1000 AMPS TO 5000 AMPS
- MAX APERTURE SIZE 82x162mm
- MAX OVERALL DIMENSIONS 195x245mm
- CLASS 1 (class 0.5 on request)
- 1 AMP OR 5 AMP SECONDARIES



P/No.	CLASS	VA
FOX.SC816 1000/5	1	20
FOX.SC816 1200/5	1	20
FOX.SC816 1500/5	1	30
FOX.SC816 1600/5	1	30
FOX.SC816 2000/5	1	30
FOX.SC816 2500/5	1	30
FOX.SC816 3000/5	1	45
FOX.SC816 4000/5	1	45
FOX.SC816 5000/5	1	45

DIMENSIONS

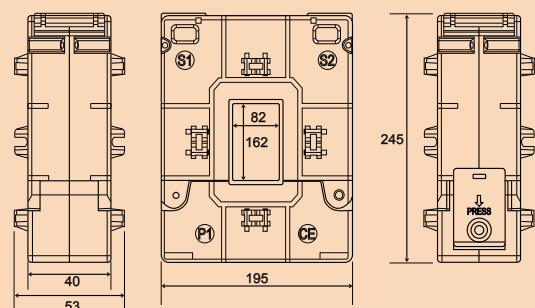

1 Amp secondaries available to special order, along with Class 0.5 on some ratios, please consult our sales office.